

G10B-A001 系列

M4安装孔防水微型微动开关



- 特点
- ◆ 防水防尘（IP67）设计
 - ◆ 瞬动式触点构造
 - ◆ 使用M4螺钉进行单点安装
 - ◆ 广泛应用于汽车控制、家电控制、工业控制等领域

- 应用
- ◆ 汽车
 - ◆ 充电桩
 - ◆ 充电枪
 - ◆ 空调
 - ◆ 通信


■特性参数

额定值		1A/30VDC
操作频率	电气	10 ~ 30次/分
	机械	120次/分
初始接触电阻		100mΩ Max.
绝缘电阻		100MΩ Min.
抗电强度		500VAC 50 ~ 60Hz for 1 Min
使用环境温度		-40℃ ~ +85℃
使用环境湿度		85% RH Max
寿命	电气	10,000次
	机械	300,000次


G10B-A001系列微动开关订货型号指引

G10B	—	A	—	0	—	1	—	150	—	T001	—	U								
开关类别	G10B-A001 系列微动开关	操作柄类型	线规	接触形式	线长	定制代码	LOGO													
								A	08#手柄	0	UL1007-18AWG	1	SPDT 单极双投	150	150mm	通用型	U	Unionwell		
								C	11#手柄	1	UL1007-22AWG	2	SPST-NC 单极单投-常闭	...	其他	T001	按客人要求订制， 定制代码为 T+流水号XXX， 例如：T001	...	其他	
											2	AVSS 0.5mm ²				...	其他			
											3	UL1007-20AWG								


■ 安装孔尺寸

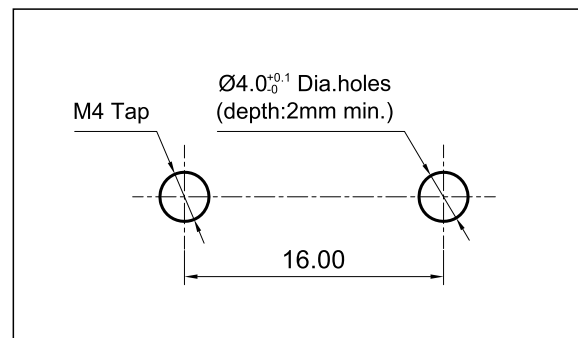

■ 接触形式图

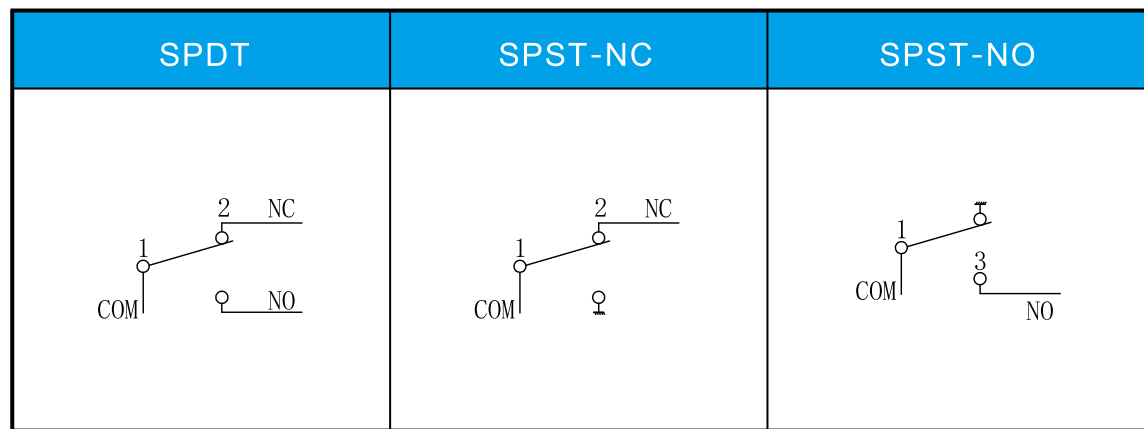


■ 出线类型

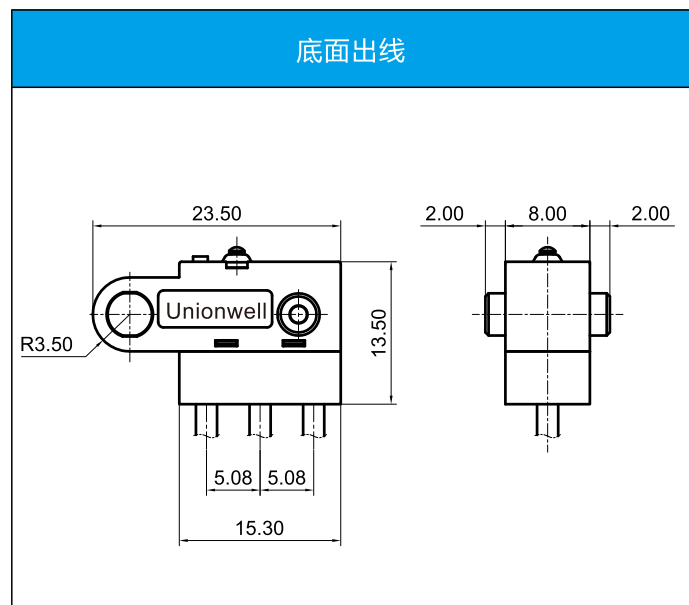

■ 外形尺寸和操作特性

◆ G10B-A□□1U

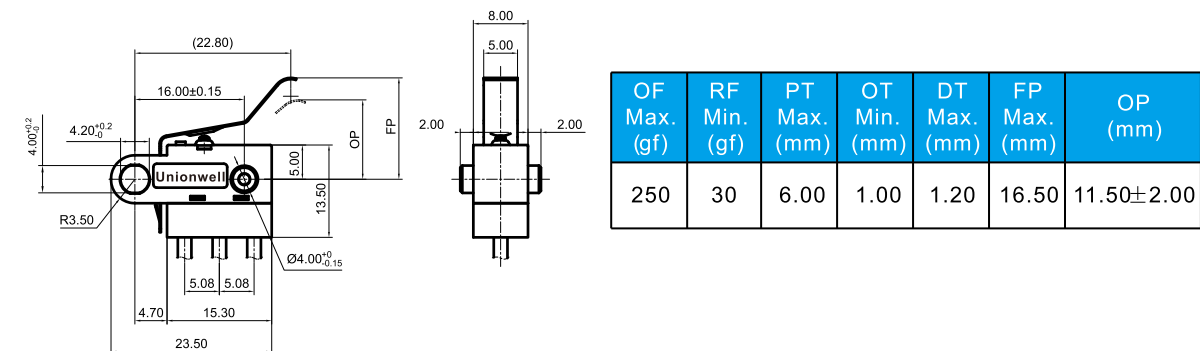

◆ G10B-C□□1U

